

HIFLY
RADIAL
PATTERN
RANGE

ROAD

LONG & REGIONAL HAUL

MIXED SERVICE


OFF ROAD

POSITION

ALL POSITION



STEER/TRAILER



DRIVE



TRAILER





ALL POSITION



HH105

Features

- ▶ Three groove design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide outstanding wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide excellent heat dissipation



HH117

Features

- ▶ Three zigzag grooves design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide excellent wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide outstanding heat dissipation



HAR515

Features

- ▶ Special tread compound
- ▶ Three zigzag grooves
- ▶ Special groove design
- ▶ Optimized pattern design

Benefits

- ▶ Provide outstanding resistance to abrasion
- ▶ Provide good applicability for all position
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to irregular abrasion



HAR532

Features

- ▶ Special tread compound
- ▶ Rib pattern with horizontal siping and grooves

Benefits

- ▶ Lower fuel consumption
- ▶ Better handling and traction



Long Haul



Regional Haul



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

Size	HH105	HH117	HAR515	HAR532
9.00R20	144/142 K			
10.00R20	149/146 K			
11.00R20	152/149 K			
12.00R20	154/151 K			
11R22.5			144/142 M	144/142 M
11R22.5			148/145 L	146/143 L
12R22.5		152/149 L	152/149 L	
11R24.5				146/143 M
11R24.5				149/146 L
275/70R22.5			148/145 M	
295/75R22.5				144/141 M
295/75R22.5				146/143 L
295/80R22.5			152/149 M	
315/80R22.5			156/152 K	
285/75R24.5				144/142 M
285/75R24.5				147/144 L



ALL POSITION



HAR518

Features

- ▶ Special tread compound
- ▶ Three zigzag grooves
- ▶ Special groove design
- ▶ Optimized pattern design

Benefits

- ▶ Provide outstanding resistance to abrasion
- ▶ Provide good applicability for all position
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to irregular abrasion



HH599+

Features

- ▶ Four circumferential grooves
- ▶ Ladder arrangement design of longitudinal pattern
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Reduce irregular wear greatly
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HAL535

Features

- ▶ Special tread compound
- ▶ Rib pattern with horizontal siping and grooves

Benefits

- ▶ Better mileage and wear resistance
- ▶ Improved handling and wet grip



HAL536

Features

- ▶ Special tread compound
- ▶ Rib pattern with horizontal siping and grooves

Benefits

- ▶ Better mileage and wear resistance
- ▶ Improved handling and wet grip

Size	HAR518	HH599+	HAL535	HAL536
8.25R15			129/127 L	
8.25R15TR			129/127 L	
10.00R15TR			137/135 L	
11.00R20		152/149 J		
8R19.5				124/122 M
9R22.5				136/134 M
10R22.5				141/139 M
215/75R17.5			135/133 J	
225/75R17.5	129/127 M			
235/75R17.5			143/141 J	
245/70R17.5	136/134 M			
245/70R17.5	143/141 J(146/146 F)			
225/70R19.5			128/126 M	
245/70R19.5			133/131 M	
245/70R19.5	136/134 M			
245/70R19.5	141/140 J			
265/70R19.5	140/138 M			
265/70R19.5	143/141 J			
285/70R19.5	146/144 L(144/142 M)			
285/70R19.5	150/148 J			
255/70R22.5				
275/70R22.5			140/137 L	
315/80R22.5			152/148 J	157/154 K



ALL POSITION



HAU512

Features

- ▶ Reinforced sidewalls
- ▶ Special compound for urban application
- ▶ New construction

Benefits

- ▶ Better protection against curbing and abrasions
- ▶ Improved mileage
- ▶ Improved retreadability

Size	HAU512
275/70R22.5	148/145 J



STEER/TRAILER



***HH101**

Features

- ▶ Four wide circumferential grooves
- ▶ Special groove design
- ▶ Siped rib and shoulder design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Deliver stone-ejecting property
- ▶ Provide excellent heat dissipation



***HH102**

Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Ensure excellent handling and safe performance
- ▶ Deliver lower rolling resistance



***HH104**

Features

- ▶ Four zigzag grooves
- ▶ Solid shoulder design
- ▶ Variable pitch design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance



***HH104+**

Features

- ▶ Four zigzag grooves
- ▶ Solid shoulder design
- ▶ Variable pitch design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance

Size	HH101	HH102	HH104	HH104+	Remarks
9.00R20			144/142 K		The symbol of "*" represents patterns applicable for all position bus.
10.00R20			149/146 K		
11.00R20			152/149 K		
12.00R20			154/151 K		
11R22.5	146/143 M	146/143 M	146/143 M		
12R22.5	152/149 M	152/149 M			
13R22.5		156/152L(154/151 M)			
215/75R17.5		135/133 J			
255/70R22.5		140/137 L			
295/80R22.5		152/149 M			
315/70R22.5		154/150 L			
315/80R22.5		156/152L(154/151 M)		156/152L(154/151M)	



STEER/TRAILER



HH106

Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Deliver lower rolling resistance



HH111

Features

- ▶ Solid rib design combined with multiple sipes
- ▶ Four wide circumferential grooves
- ▶ Solid shoulder design

Benefits

- ▶ Provide excellent heat dissipation and improved regular wear with lower resistance
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide outstanding resistance to abrasion



HH121

Features

- ▶ Four circumferential grooves
- ▶ Solid shoulder design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance



HH123

Features

- ▶ Four circumferential grooves
- ▶ Solid shoulder design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance

Size	HH106	HH111	HH121	HH123
8.25R16LT			128/124 M	
11.00R20			152/149 K	152/149 K
9.5R17.5			143/141 J	
11R22.5		146/143 L		
11R24.5		146/143 L		
215/75R17.5		135/133 M		
235/75R17.5		132/130 M		
225/70R19.5		128/126 L		
245/70R19.5		135/133 L		
255/70R22.5		140/137 L		
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M		152/149 M	
315/70R22.5			154/150 L	
315/80R22.5			156/152L(154/151M)	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



STEER/TRAILER



HH124

Features

- ▶ Solid rib design combined with multiple sipes
- ▶ Four wide circumferential grooves
- ▶ Solid shoulder design

Benefits

- ▶ Provide excellent heat dissipation and improved regular wear with lower resistance
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide outstanding resistance to abrasion



HSL129

Features

- ▶ Special tread compound
- ▶ Shoulder protection design

Benefits

- ▶ Lower fuel consumption
- ▶ Reduce uneven wear on shoulder

Size	HH124	HSL129
11R22.5		144/142 M
11R24.5		146/143 M
295/75R22.5		144/141 M
315/80R22.5	156/152 L(154/151 M)	
285/75R24.5		144/142 M



DRIVE



HH122

Features

- ▶ Three circumferential grooves
- ▶ Block pattern design
- ▶ Special tread compound
- ▶ Solid shoulder design

Benefits

- ▶ Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide outstanding resistance to abrasion



HH309

Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH122	HH368	HH309	HH310
10.00R20		149/146 K		
12.00R24	160/157 K			160/157 K
11R22.5			146/143 K	
12R22.5			152/149 L	
13R22.5			156/152 K	
215/75R17.5			135/133 J	
235/75R17.5			143/141 J	
295/80R22.5		152/149 M	152/149 M	
315/70R22.5			154/140 L	
315/80R22.5	156/152 L		156/152 L	
315/80R22.5	154/151 M			



HH368

Features

- ▶ Special tread compound
- ▶ Four circumferential grooves
- ▶ Deeper tread depth design
- ▶ Block pattern design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Improved mileage performance
- ▶ Provide excellent driving and braking force



HH310

Features

- ▶ Four circumferential grooves
- ▶ Block pattern design
- ▶ Special tread compound
- ▶ Solid shoulder design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide outstanding resistance to abrasion



HH312

Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation



HH308A

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



HH505

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



HDL230

Features

- ▶ Solid and wide shoulder with deep tread
- ▶ Stone ejectors

Benefits

- ▶ Better mileage
- ▶ Prevent stone drilling



HDR233

Features

- ▶ Deep groove with stone ejectors
- ▶ Open shoulder block pattern

Benefits

- ▶ Prevent stone drilling
- ▶ Improved traction



HDR255

Features

- ▶ Special tread compound
- ▶ Special drive tread design and optimised footprint
- ▶ New construction

Benefits

- ▶ Improved mileage
- ▶ Better traction and handling
- ▶ Even wear

Size	HH312	HH308A	HH505	HDL230
10.00R20		149/146 K	149/146 K	
11R22.5		148/145 M		144/142 M
11R22.5				146/143 L
12R22.5		152/149 M		
11R24.5	146/143 M			146/143 L
11R24.5	149/146 L			149/146 L
295/75R22.5	144/141 M			144/141 M
295/75R22.5	146/143 L			146/143 L
285/75R24.5	144/141 M			144/142 L
285/75R24.5	147/144 L			147/144 L
315/70R22.5		154/150 L		
315/80R22.5		156/152 L		
315/80R22.5		154/151 M		

Size	HDR233	HDR255
10R22.5	141/139 L	
11R22.5	146/143 L	
11R24.5	149/146 L	
265/70R19.5		143/141 J



TRAILER



HH107

Features

- ▶ Four zigzag grooves
- ▶ Extra wide footprint with square shoulder
- ▶ Special tread compound

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Enhanced stability and resistance to abrasion
- ▶ Provide outstanding resistance to abrasion



HH118

Features

- ▶ Four circumferential grooves
- ▶ Special groove design
- ▶ Curved lug design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Deliver stone-ejecting property
- ▶ Deliver excellent driving and braking force



HTL325

Features

- ▶ Special tread compound

Benefits

- ▶ Better mileage



TRAILER



HTL331

Features

- ▶ Special tread compound
- ▶ Rib pattern with siping

Benefits

- ▶ Lower fuel consumption
- ▶ Better wet grip performance and lateral stability



HTL311

Features

- ▶ Optimized pattern design
- ▶ Special groove design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Provide outstanding resistance to irregular abrasion
- ▶ Deliver stone-ejecting property
- ▶ Ensure excellent handling and safe performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Deliver lower rolling resistance



HTL323

Features

- ▶ Special tread compound

Benefits

- ▶ Improved mileage



HTL357

Features

- ▶ Optimization of the ratio of tread block
- ▶ Low rolling resistance tire tread compound formulation
- ▶ Multiple angle groove wall and stone kicker design
- ▶ Extra wide ground contact

Benefits

- ▶ Prevent uneven wear
- ▶ Provide better fuel efficiency
- ▶ Deliver stone ejecting property
- ▶ Provide excellent longer wear performance and high mileage

Size	HH107	HH118	HTL311	HTL323
11R22.5		146/143 M		
12R22.5		152/149 M		
235/75R17.5	143/141 J			
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
385/55R22.5			160(158) K(L)	
385/65R22.5	160 K		160(158) K(L)	
425/65R22.5			165 K	
445/65R22.5			169 K	
ST235/85R16				129/125 L
ST235/85R16				129/125 L
ST235/85R16				132/127 L

Size	HTL325	HTL331	HTL357
11R22.5		144/142 M	
11R24.5		146/143 M	
295/75R22.5		144/141 M	
285/75R24.5		144/142 M	
435/50R19.5			160 J
ST225/75R15	121/117 M		



ALL POSITION



HH301

Features

- ▶ Three zigzag grooves
- ▶ Combination of rib and lug design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Deliver outstanding traction and handling
- ▶ Provide excellent heat dissipation



HH301+

Features

- ▶ Three zigzag grooves
- ▶ Combination of rib and lug design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Deliver outstanding traction and handling
- ▶ Provide excellent heat dissipation



HH307

Features

- ▶ Three zigzag grooves
- ▶ Reinforced carcass and bead design
- ▶ Special groove design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity
- ▶ Deliver stone-ejecting property
- ▶ Provide excellent heat dissipation



HAM517

Features

- ▶ Three zigzag grooves
- ▶ Combination of rib and lug design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Deliver outstanding traction and handling
- ▶ Provide excellent heat dissipation



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site

Size	HH301	HH301+	HH307	HAM517
6.50R16LT	113/110 K			
7.00R16LT	118/114 M			
7.50R16LT		122/118 M		
8.25R16LT	128/124 M			
8.25R20	139/137 L			
9.00R20	144/142 K			
10.00R20	149/146 K		149/146 K	
11.00R20	152/149 K		152/149 K	
12.00R20	154/151 K		154/151 K	
12.00R24	160/157 K			160/157 K
11R22.5	146/143 K			148/145 K
12R22.5	152/149 M			152/149 K
13R22.5	156/152 L(154/151 M)			
11R24.5	149/146 L			
295/80R22.5				152/149 K
315/80R22.5		156/152 L(154/151 M)		156/152 K



ALL POSITION



Features

- ▶ Zigzag pattern
- ▶ Special tread compound

Benefits

- ▶ Improved traction and handling in mixed service application
- ▶ Better resistance to chipping



DRIVE



Features

- ▶ Special tread compound
- ▶ Block pattern design
- ▶ Extra wide footprint with square shoulder
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



Features

- ▶ Lug and block pattern design
- ▶ Special tread compound

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing



Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Siped pattern and shoulder design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Provide excellent heat dissipation



Features

- ▶ Lug and block pattern design
- ▶ Special groove design
- ▶ Special tread compound
- ▶ Open shoulder design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide excellent heat dissipation

Size	HAM537
11R22.5	146/143 K
11R24.5	149/146 K

Size	HH302	HH306	HH311	HH313
7.00R16LT		118/114 M		
7.50R16LT		122/118 M		
8.25R16LT		128/124 M		128/124 L
8.25R20		139/137 L		139/137 K
9.00R20		144/142 J	144/142 J	144/142 K
10.00R20	149/146 K	149/146 K	149/146 K	149/146 K
11.00R20	152/149 J	152/149 K	152/149 K	152/149 K
12.00R20	154/151 K	154/151 K	154/151 K	154/151 K
12R22.5	152/149 M		152/149 M	
13R22.5	156/152L(154/151 M)			
315/80R22.5	156/152L(154/151 M)			



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HH322



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HH329



Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, resistance to cutting and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property

HH303



Features

- Deep tread block pattern
- Special groove design
- Tread compound for mixed service

Benefits

- Improved traction
- Self cleaning
- Better resistance to chipping

HDM216

Size	HH322	HH329	HH303	HDM216
7.00R16LT			118/114 K	
7.50R16LT			122/118 J	
8.25R16LT			128/124 J	
8.25R20			139/137 K	
9.00R20			144/142 J	
10.00R20		149/146 K	149/146 K	
11.00R20		152/149 K	152/149 J	
12.00R20		154/151 K	154/151 K	
12.00R24	160/157 K	160/157 K		
11R22.5				146/143 J(148/145 G)



Features

- Special tread compound
- Lug and block pattern design
- Special groove design

HTM313

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Deliver stone-ejecting property

Size	HTM313
385/65R22.5	160 K(158 L)



HH168

Features

- ▶ Special tread compound
- ▶ Lug and special block pattern design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance



HH317

Features

- ▶ Special tread compound
- ▶ Block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH168	HH317
7.00R16LT	118/114 K	
7.50R16LT	122/118 K	
8.25R16LT	128/124 K	
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	149/146 K
11.00R20		152/149 K
12.00R20	154/151 K	154/151 K



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions



DRIVE/TRAILER



HH318

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HH320

Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH318	HH320
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	
11.00R20	152/149 C	
12.00R20	154/151 K	
295/80R22.5	152/149 C	156/153 K



DRIVE/TRAILER



HH321

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HH321
11.00R20	152/149 C
12.00R20	154/151 K

PRODUCT RANGE



DIMENSION	HH105	HH117	HAR532	HAR515	HAR518	HH599+	HAL535	HAL536	HAU512	HH101	HH102	HH104	HH104+	HH106	HH111	HH121	HH123	HH124	
8.25R15(TR) 14PR							129/127 L												
8.25R16LT 16PR																128/124 M			
9.00R20 16PR	144/142 K											144/142 K							
10.00R15TR 14PR							137/135 L												
10.00R20 18PR	149/146 K											149/146 K							
11.00R20 18PR	152/149 K					152/149 J						152/149 K				152/149 K	152/149 K		
12.00R20 18PR	154/151 K											154/151 K							
9.5R17.5 16PR																143/141 J			
8R19.5 12PR								124/122 M											
9R22.5 14PR								136/134 M											
10R22.5 14PR								141/139 M											
11R22.5 14PR			144/142 M	144/142 M															
11R22.5 16PR			146/143 L	148/145 L						146/143 M	146/143 M	146/143 M			146/143 L				
12R22.5 18PR	152/149 L			152/149 L						152/149 M	152/149 M								
13R22.5 20PR											154/151 M/156/152 L								
11R24.5 14PR			146/143 M												146/143 M				
11R24.5 16PR			149/146 L																
215/75R17.5 16PR							135/133 J				135/133 J				135/133 M				
225/75R17.5 14PR					129/127 M														
235/75R17.5 16PR							143/141 J								132/130 M				
245/70R17.5 16PR					136/134 M														
245/70R17.5 18PR					143/141 J/146/146 F														
225/70R19.5 14PR							128/126 M								128/126 L				
245/70R19.5 14PR							133/131 M												
245/70R19.5 16PR					136/134 M										135/133 L				
245/70R19.5 18PR					141/140 J														
265/70R19.5 16PR					140/138 M														
265/70R19.5 18PR					143/141 J														
285/70R19.5 16PR					146/144 L/144/142 M														
285/70R19.5 18PR					150/148 J														
255/70R22.5 16PR							140/137 L				140/137 L				140/137 L				
275/70R22.5 16PR				148/145 M					148/145 J										
275/70R22.5 18PR							152/148 J												
295/75R22.5 14PR			144/141 M												144/141 M				
295/75R22.5 16PR			146/143 L												146/143 L				
295/80R22.5 18PR				152/149 M						152/149 M				152/149 M		152/149 M			
315/70R22.5 20PR										154/150 L					154/150 L				
315/80R22.5 20PR				156/152 K			157/154 K			154/151 M/156/152 L		154/151 M/156/152 L			154/151 M/156/152 L			154/151 M/156/152 L	
285/75R24.5 14PR			144/142 M												144/141 M				
285/75R24.5 16PR			147/144 L												147/144 L				

PRODUCT RANGE



DIMENSION	HSL129	HH122	HH368	HH309	HH310	HH312	HH308A	HH505	HDL230	HDR233	HDR255	HH107	HH118	HTL311	HTL323	HTL325	HTL331	HTL357	
10.00R20 18PR			149/146 K				149/146 K	149/146 K											
12.00R24 20PR		160/157 K			160/157 K														
10R22.5 14PR											141/139 L								
11R22.5 14PR	144/142 M									144/142 M								144/142 M	
11R22.5 16PR				146/143 K			148/145 M		146/143 L	146/143 L			146/143 M						
12R22.5 18PR				152/149 L			152/149 M						152/149 M						
13R22.5 20PR				156/152 K															
11R24.5 14PR	146/143 M						146/143 M		146/143 L									146/143 M	
11R24.5 16PR							149/146 L		149/146 L	149/146 L									
215/75R17.5 16PR				135/133 J															
235/75R17.5 16PR				143/141 J								143/141 J							
435/50R19.5 20PR																			160 J
265/70R19.5 18PR											143/141 J								
295/75R22.5 14PR	144/141 M						144/141 M		144/141 M				144/141 M					144/141 M	
295/75R22.5 16PR							146/143 L		146/143 L				146/143 L						
295/80R22.5 18PR			152/149 M	152/149 M															
315/70R22.5 20PR				154/150 L															
315/80R22.5 20PR		154/151 M(156/152 L)		154/151 M(156/152 L)			154/150 L												
315/80R22.5 20PR							154/151 M(156/152 L)												
385/55R22.5 20PR																			160 K(158 L)
385/65R22.5 20PR												160 K							160 K(158 L)
425/65R22.5 20PR																			165 K
445/65R22.5 20PR																			169 K
285/75R24.5 14PR	144/142 M						144/141 M		144/142 L										144/142 M
285/75R24.5 16PR							147/144 L		147/144 L										
ST225/75R15 12PR																			121/117 M
ST235/85R16 12PR																			129/125 L
ST235/85R16 14PR																			129/125 L
ST235/85R16 14PR																			132/127 L

PRODUCT RANGE



DIMENSION	HH301	HH301+	HH307	HAM517	HAM537	HH302	HH306	HH311	HH313	HH322	HH329	HH303	HDM216	HTM313	HH168	HH317	HH318	HH320	HH321	
6.50R16LT 12PR	113/110 K																			
7.00R16LT 14PR	118/114 M						118/114 M					118/114 K			118/114 K					
7.50R16LT 14PR	122/118 M						122/118 M					122/118 J			122/118 K					
8.25R16LT 16PR	128/124 M						128/124 M		128/124 L			128/124 J			128/124 K					
8.25R20 16PR	139/137 L						139/137 L		139/137 K			139/137 K			139/137 C		139/137 C			
9.00R20 16PR	144/142 K						144/142 J	144/142 J	144/142 K			144/142 J			144/142 C		144/142 C			
10.00R20 18PR	149/146 K		149/146 K			149/146 K	149/146 K	149/146 K	149/146 K		149/146 K	149/146 K			149/146 C	149/146 K	149/146 C			
11.00R20 18PR	152/149 K		152/149 K			152/149 J	152/149 K	152/149 K	152/149 K		152/149 K	152/149 J				152/149 K	152/149 C		152/149 C	
12.00R20 18PR	154/151 K		154/151 K			154/151 K	154/151 K	154/151 K	154/151 K		154/151 K	154/151 K			154/151 K	154/151 K	154/151 K		154/151 K	
12.00R24 20PR	160/157 K			160/157 K						160/157 K	160/157 K									
11R22.5 16PR	146/143 K			148/145 K	146/143 K								146/143 (148/145 G)							
12R22.5 18PR	152/149 M			152/149 K		152/149 M		152/149 M												
13R22.5 20PR	154/151 M(156/152 L)					154/151 M(156/152 L)														
11R24.5 16PR	149/146 L				149/146 K															
295/80R22.5 18PR				152/149 K														152/149 C	152/149 C	
315/80R22.5 20PR		154/151 M(156/152 L)		156/152 K		154/151 M(156/152 L)														
385/65R22.5 20PR														160 K(158 L)						

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
6.50R16LT	12	8.5	16	116/105	K	HH303		M		5.50P	1150	1930	770	770	11.0	185	750
7.00R16LT	14	7	16	116/114	K	HH188		O		5.50F	1320	1180	770	770	15.5	200	775
7.00R16LT	14	7	16	116/114	M	HH303		M		5.50F	1320	1180	770	770	12.0	200	775
7.00R16LT	14	7	16	116/114	K	HH303		M		5.50F	1320	1180	770	770	14.0	200	775
7.00R16LT	14	7	16	116/114	M	HH303		M		5.50F	1320	1180	770	770	14.0	200	775
7.50R16LT	14	7.5	16	120/118	K	HH188		O		6.00Q	1500	1320	770	770	16.8	215	808
7.50R16LT	14	7.5	16	120/118	M	HH303+		M		6.00Q	1500	1320	770	770	13	215	808
7.50R16LT	14	7.5	16	120/118	J	HH303		M		6.00Q	1500	1320	770	770	15	215	808
7.50R16LT	14	7.5	16	120/118	M	HH306		M		6.00Q	1500	1320	770	770	14	215	808
7.50R16LT	14	7.5	16	120/118	M	HH313		M		6.00Q	1500	1320	770	770	15	215	808
8.25R19TR	14	8.25	15	129/127	L	HAL538	M+S	L&R		8.5	1850	1750	830	830	11.5	238	847
8.25R16LT	16	8.25	16	126/124	M	HH121		L&R		6.50H	1800	1600	770	770	11.5	235	858
8.25R16LT	16	8.25	16	126/124	K	HH188		O		6.50H	1800	1600	770	770	18	235	858
8.25R16LT	16	8.25	16	126/124	M	HH303		M		6.50H	1800	1600	770	770	16	235	858
8.25R16LT	16	8.25	16	126/124	J	HH303		M		6.50H	1800	1600	770	770	16	235	858
8.25R16LT	16	8.25	16	126/124	M	HH306		M		6.50H	1800	1600	770	770	15	235	858
8.25R16LT	16	8.25	16	126/124	M	HH313		M		6.50H	1800	1600	770	770	16	235	858
8.25R20	16	8.25	20	139/137	C	HH188		O		8.5	2430	2300	930	930	21	256	974
8.25R20	16	8.25	20	139/137	L	HH303		M		8.5	2430	2300	930	930	19.5	256	974
8.25R20	16	8.25	20	139/137	K	HH303		M		8.5	2430	2300	930	930	16	256	974
8.25R20	16	8.25	20	139/137	M	HH306		M		8.5	2430	2300	930	930	16	256	974
8.25R20	16	8.25	20	139/137	C	HH313		M		8.5	2430	2300	930	930	16	256	974
8.25R20	16	8.25	20	139/137	K	HH318		O		8.5	2430	2300	930	930	16	256	974
9.00R20	16	9	20	144/142	K	HH104		L&R		7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9	20	144/142	C	HH105		L&R		7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9	20	144/142	K	HH188		O		7.0	2800	2650	900	900	21.5	259	1019
9.00R20	16	9	20	144/142	K	HH303		M		7.0	2800	2650	900	900	15.5	259	1019
9.00R20	16	9	20	144/142	J	HH303		M		7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9	20	144/142	K	HH306		M		7.0	2800	2650	900	900	16.5	259	1019
9.00R20	16	9	20	144/142	J	HH311		M		7.0	2800	2650	900	900	16.5	259	1019
9.00R20	16	9	20	144/142	K	HH313		M		7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9	20	144/142	C	HH318		M		7.0	2800	2650	900	900	17	259	1019
10.00R15TR	14	10	16	137/135	L	HAL538	M+S	L&R		7.5	2300	2180	720	720	11.5	278	827
10.00R20	16	10	20	149/146	K	HH104		L&R		7.5	3250	3000	930	930	15	278	1054
10.00R20	16	10	20	149/146	K	HH105		L&R		7.5	3250	3000	930	930	16.5	278	1054
10.00R20	16	10	20	149/146	C	HH188		O		7.5	3250	3000	930	930	22	278	1054
10.00R20	16	10	20	149/146	K	HH303		M		7.5	3250	3000	930	930	16.5	278	1054
10.00R20	16	10	20	149/146	K	HH303		M		7.5	3250	3000	930	930	16	278	1054
10.00R20	16	10	20	149/146	K	HH306		M		7.5	3250	3000	930	930	16	278	1054
10.00R20	16	10	20	149/146	K	HH311		M		7.5	3250	3000	930	930	17	278	1054
10.00R20	16	10	20	149/146	K	HH313		M		7.5	3250	3000	930	930	18	278	1054
10.00R20	16	10	20	149/146	K	HH317		O		7.5	3250	3000	930	930	20.5	278	1054
10.00R20	16	10	20	149/146	C	HH318		O		7.5	3250	3000	930	930	18	278	1054
10.00R20	16	10	20	149/146	K	HH308		L&R		7.5	3250	3000	930	930	21	278	1054
10.00R20	16	10	20	149/146	K	HH305		L		7.5	3250	3000	930	930	20.5	278	1054
11.00R20	18	11	20	152/149	K	HH104		L&R		8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11	20	152/149	K	HH105		L&R		8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11	20	152/149	K	HH123		L&R		8.0	3550	3250	930	930	15.5	293	1085
11.00R20	18	11	20	152/149	K	HH123		L&R		8.0	3550	3250	930	930	18.0	293	1085
11.00R20	18	11	20	152/149	K	HH303		M		8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11	20	152/149	J	HH303		M		8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11	20	152/149	K	HH306		M		8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11	20	152/149	J	HH306		M		8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11	20	152/149	K	HH308		M		8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11	20	152/149	K	HH307		M		8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11	20	152/149	K	HH311		M		8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11	20	152/149	K	HH313		M		8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11	20	152/149	K	HH317		O		8.0	3550	3250	930	930	21	293	1085
11.00R20	18	11	20	152/149	C	HH318		O		8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11	20	152/149	C	HH321		O		8.0	3550	3250	930	930	24	293	1085




Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11.00R20	18	11	20	152/149	K	HH329		M		8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11	20	152/149	J	HH329		L&R		8.0	3550	3250	930	930	17.6	293	1085
12.00R20	18	12	20	154/151	K	HH104		L&R		8.5	3750	3450	930	930	17.6	315	1128
12.00R20	18	12	20	154/151	K	HH105		L&R		8.5	3750	3450	930	930	17.5	315	1128
12.00R20	18	12	20	154/151	K	HH188		O		8.5	3750	3450	930	930	24	315	1128
12.00R20	18	12	20	154/151	K	HH303		M		8.5	3750	3450	930	930	17.6	315	1128
12.00R20	18	12	20	154/151	K	HH303		M		8.5	3750	3450	930	930	20	315	1128
12.00R20	18	12	20	154/151	K	HH306		M		8.5	3750	3450	930	930	16.5	315	1128
12.00R20	18	12	20	154/151	K	HH307		M		8.5	3750	3450	930	930	18	315	1128
12.00R20	18	12	20	154/151	K	HH313		M		8.5	3750	3450	930	930	19	315	1128
12.00R20	18	12	20	154/151	K	HH313		M		8.5	3750	3450	930	930	20	315	1128

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11R22.5	20	13	22.5	150(152/154/151)	L/M	HH301	M+S	M		9.75	4000	3500	800	860	16.5	320	1124
11R22.5	20	11	22.5	150(152/154/151)	L/M	HH302	M+S	M		9.75	4000	3600	875	875	20	320	1124
11R22.5	20	13	22.5	150(152/154/151)	L/M	HH300	M+S	L&R		9.75	4000	3500	800	860	16	320	1124
11R24.5	14	11	24.5	146/143	M	HH111		L&R		8.25	3000	2725	720	720	15	279	1104
11R24.5	14	11	24.5	146/143	M	HH312		L&R		8.25	3000	2725	720	720	21.5	279	1104
11R24.5	14	11	24.5	146/143	L	HDL230	M+S	L&R		8.25	3000	2725	720	720	21.5	279	1116
11R24.5	14	11	24.5	146/143	M	HARS32	M+S	L&R		8.25	3000	2725	720	720	15	279	1104
11R24.5	14	11	24.5	146/143	M	HTL331	M+S	L&R		8.25	3000	2725	720	720	11	279	1104
11R24.5	14	11	24.5	146/143	M	HSL129	M+S	L&R		8.25	3000	2725	720	720	11	279	1104
11R24.5	18	11	24.5	149/146	L	HH111		L&R		8.25	3250	3000	830	830	15	279	1104
11R24.5	18	11	24.5	149/146	L	HH301	M+S	M		8.25	3250	3000	830	830	15.5	279	1104
11R24.5	18	11	24.5	149/146	L	HH312		L&R		8.25	3250	3000	830	830	21.5	279	1104
11R24.5	18	11	24.5	149/146	L	HDL230	M+S	L&R		8.25	3250	3000	830	830	21.5	279	1116
11R24.5	18	11	24.5	149/146	L	HARS32	M+S	L&R		8.25	3250	3000	830	830	15	279	1104
11R24.5	18	11	24.5	149/146	L	HDR233	M+S	L&R		8.25	3250	3000	830	830	21.5	279	1116
11R24.5	18	11	24.5	149/146	K	HAMS37	M+S	M		8.25	3250	3000	830	830	17.5	279	1104
215/70R17.5	16	215	75	17.5	135/133	J	HH102	M+S	L&R	6.00	2180	2060	850	850	12	212	787
215/70R17.5	16	215	75	17.5	135/133	M	HH111	M+S	L&R	6.00	2180	2060	850	850	13	212	787
215/70R17.5	16	215	75	17.5	135/133	J	HH300	M+S	L&R	6.00	2180	2060	850	850	14	212	787
215/70R17.5	16	215	75	17.5	135/133	J	HAL535	M+S	L&R	6.00	2180	2060	850	850	11.5	212	787
225/70R17.5	14	225	75	17.5	129/127	M	HARS18	M+S	L&R	6.75	1850	1750	725	725	13	226	793
235/70R17.5	16	235	75	17.5	143/141	J	HH107	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/70R17.5	16	235	75	17.5	143/141	M	HH111	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/70R17.5	16	235	75	17.5	143/141	J	HH300	M+S	L&R	6.75	2725	2575	875	875	15	233	797
235/70R17.5	16	235	75	17.5	143/141	J	HAL535	M+S	L&R	6.75	2725	2575	875	875	11.5	233	797
245/70R17.5	16	245	70	17.5	136/134	M	HARS18		L&R	7.50	2240	2120	850	850	13	248	799
245/70R17.5	16	245	70	17.5	143/141(146/144)	J/F	HARS18		L&R	7.50	2775	2575	875	875	11	248	799
435/90R19.5	20	435	90	19.5	90	J	HTL307		L&R	14.00	4500		900		13.5	438	831
225/70R19.5	14	225	70	19.5	128/128	L	HH111		L&R	6.75	1800	1700	760	760	13	226	811
225/70R19.5	14	225	70	19.5	128/128	M	HAL535	M+S	L&R	6.75	1800	1700	760	760	11.5	226	811
245/70R19.5	14	245	70	19.5	133/131	M	HAL535	M+S	L&R	7.50	2060	1960	760	760	11.5	248	839
245/70R19.5	16	245	70	19.5	135/133	L	HH111		L&R	7.50	2180	2060	830	830	13	248	839
245/70R19.5	16	245	70	19.5	135/134	M	HARS18	M+S	L&R	7.50	2240	2120	825	825	14	248	839
245/70R19.5	18	245	70	19.5	141/140	J	HARS18	M+S	L&R	7.50	2975	2500	850	850	14	248	839
285/70R19.5	16	285	70	19.5	140/138	M	HARS18	M+S	L&R	7.50	2500	2360	775	775	14	282	867
285/70R19.5	18	285	70	19.5	143/141	J	HDR236	M+S	L&R	7.50	2725	2575	850	850	18	282	867
285/70R19.5	18	285	70	19.5	143/141	J	HARS18	M+S	L&R	7.50	2725	2575	850	850	14	282	867
285/70R19.5	18	285	70	19.5	140/144(144/142)	L/M	HARS18	M+S	L&R	8.25	3000	2800	850	850	14	282	890
285/70R19.5	18	285	70	19.5	150/148	J	HARS18	M+S	L&R	8.25	3350	3150	900	900	14	282	896
255/70R22.5	16	255	70	22.5	140/137	L	HH102		L&R	7.50	2500	2300	830	830	14	255	830
255/70R22.5	16	255	70	22.5	140/137	L	HH111		L&R	7.50	2500	2300	830	830	15	255	830
255/70R22.5	16	255	70	22.5	140/137	L	HAL535	M+S	L&R	7.50	2500	2300	830	830	13.5	255	830
275/70R22.5	18	275	70	22.5	148/145	M	HARS18	M+S	L&R	8.25	3150	2900	900	900	15.5	278	858
275/70R22.5	18	275	70	22.5	148/145	J	HAL512	M+S	L&R	8.25	3150	2900	900	900	19.3	278	858
275/70R22.5	18	275	70	22.5	152/148	J	HAL535	M+S	L&R	8.25	3500	3100	930	930	13.5	278	858
295/70R22.5	14	295	75	22.5	144/141	M	HH111		L&R	9.00	2800	2375	760	760	15.5	298	1014
295/70R22.5	14	295	75	22.5	144/141	M	HH312		L&R	9.00	2800	2375	760	760	22	298	1020
295/70R22.5	14	295	75	22.5	144/141	M	HH118	M+S	L&R	9.00	2800	2375	760	760	11	298	1014
295/70R22.5	14	295	75	22.5	144/141	M	HDL230	M+S	L&R	9.00	2800	2375	760	760	21.5	298	1028
295/70R22.5	14	295	75	22.5	144/141	M	HARS32	M+S	L&R	9.00	2800	2375	760	760	15	298	1014
295/70R22.5	14	295	75	22.5	144/141	M	HTL331	M+S	L&R	9.00	2800	2375	760	760	11	298	1014
295/70R22.5	14	295	75	22.5	144/141	M	HSL129	M+S	L&R	9.00	2800	2375	760	760	15	298	1014
295/70R22.5	18	295	75	22.5	146/143	L	HH111		L&R	9.00	3000	2725	830	830	15.5	298	1014
295/70R22.5	18	295	75	22.5	146/143	L	HH312		L&R	9.00	3000	2725	830	830	22	298	1028
295/70R22.5	18	295	75	22.5	146/143	L	HH118	M+S	L&R	9.00	3000	2725	830	830	11	298	1014
295/70R22.5	18	295	75	22.5	146/143	L	HDL230	M+S	L&R	9.00	3000	2725	830	830	21.5	298	1028
295/70R22.5	18	295	75	22.5	146/143	L	HARS32	M+S	L&R	9.00	3000	2725	830	830	15	298	1014
295/70R22.5	18	295	75	22.5	146/143	L	HARS32	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HH121	M+S	L&R	9.00	3500	3200	900	900	18.5	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HH102	M+S	L&R	9.00	3500	3200	900	900	15	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HH108	M+S	L&R	9.00	3550	3250	900	900	19	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HH300	M+S	L&R	9.00	3550	3250	900	900	20.5	298	1044
295/70R22.5	18	295	80	22.5	152/149	C	HH318	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HH388	M+S	L&R	9.00	3550	3250	900	900	18	298	1044
295/70R22.5	18	295	80	22.5	152/149	M	HARS18	M+S	L&R	9.00	3550	3250	900	900	16	298	1044
295/70R22.5	18	295	80	22.5	152/149	K	HAMS17	M+S	M	9.00	3550	3250	900	900	16	298	1044
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HH102	M+S	L&R	9.00	3750	3300	900	900	15	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HH121	M+S	L&R	9.00	3750	3300	900	900	15.5	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HH300A	M+S	L&R	9.00	3750	3300	900	900	20	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HH309	M+S	L&R	9.00	3750	3300	900	900	21	312	1014
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH102	M+S	L&R	9.00	4000	3900	880	880	14.5	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH104	M+S	L&R	9.00	4000	3900	880	880	14.5	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH121	M+S	L&R	9.00	4000	3900	880	880	15.5	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH122	M+S	L&R	9.00	4000	3900	880	880	16.5	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH124	M+S	L&R	9.00	4000	3900	880	880	16.8	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M	HH301A	M+S	M	9.00	4000	3900	880	880	17.5	312	1076
315/70R22.5	20	315	80	22.5	158/152(154/151)	L/M											

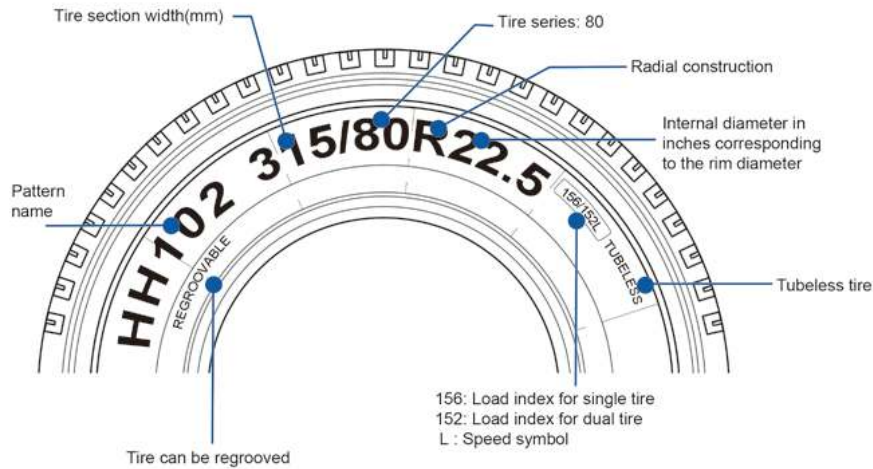

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force

Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170

Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Important instructions for safe inflation

Over-inflation reduces:

- Comfort
- Grip
- Braking distance
- Tire life span, particularly on drive axle tires
- Safety


Under-inflation leads to:

- Reduced vehicle handling and safety
- A reduction in casing retreadability
- An increase of rolling resistance consequently of fuel consumption

Over-inflation

Under-inflation

Effect of inflation pressure on tire life

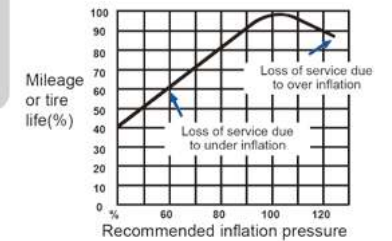

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours): pressures must be checked at regular intervals and during each service
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert